

# 1300 Series

## 1306C-E87TAG4

Diesel engine - Electropak

217 kWm 1500 rev/min

235 kWm 1800 rev/min

The Perkins 1300 Series family of Electropak engines has become renowned throughout the power generation industry for the engines' superior performance and reliability.

The 1306C-E87TAG4 engine is a turbocharged and air-to-air charge cooled unit, featuring hydraulically-actuated electronically controlled unit injectors (HEUI) with 'full authority' electronic engine management providing reliable, quiet, economic operation supported by the quick starting, fast response and close control demanded by the electrical power generation market.

### High Performance Productive Power

- Hydraulically actuated Electronically controlled Unit Injectors – high-pressure fuel injection gives consistent, reliable high performance.
- Constant electronic engine management and monitoring enable precise fuel metering and injection timing to ensure reliable low temperature starting, superb economy with performance and very close governing.

### Quiet, Clean Power

- A rigid structure minimises noise transmission and helically cut gears provide quiet power transfer to auxiliaries.
- Forced induction and electronic fuel injection control combine to reduce combustion noise while electronically optimised fuel/air mixing ensures complete combustion resulting in virtually smoke free operation with emissions capability matching current and future emissions legislation.

### Durable Power

- A fully balanced induction-hardened steel crankshaft gives smooth performance with minimised bearing loads.
- Oil cooled pistons with keystone top and second rings give longer life while positive rotational valves and roller cam followers reduce wear on valve seats, tappets and cam lobes.

### Reliable Power

- Cylinder head coolant is directed to valve bridges and injectors and lubricating oil is cooled in a high efficiency oil cooler, both features enhancing engine reliability.
- Electronic safety shutdown option protects the engine while event and fault warning codes protect operations.

### Easy Maintenance

- Electronic diagnostics help to keep the engine at its productive best while enabling the operator to plan maintenance. Oil and filter changes at 450 hours reduce down time.
- All engines are supported by the Perkins worldwide network of 4,000 distributors and dealers.

*Certified against the requirements of EU2007 (EU97/68/EC Stage II) legislation for non-road mobile machinery, powered by constant speed engines.*

Engine Speed (rev/min)	Type of Operation	Typical Generator Output (net)		Engine Power			
		kVA	kWe	Gross		Net	
				kW	bhp	kW	bhp
1500 Rating Code M429	Baseload Power Prime Power Standby (maximum)	205 228 250	165 182 200	185 205 224	248 273 300	179 198 217	241 265 291
1800 Rating Code M432	Baseload Power Prime Power Standby (maximum)	223 245 270	178 196 216	200 220 242	269 295 325	194 213 235	261 286 315

1500/1800 rev/min switchable ratings are offered for stand-alone non-load sharing gen set applications. Rating code M165 applies.  
The above ratings represent the engine performance capabilities to conditions specified in ISO 8528/1, ISO 3046/1:1986, BS5514/1, DIN 6271.

Derating may be required for conditions outside these; consult Perkins Engines Company Limited  
Generator powers are typical and are based on an alternator efficiency of 92% and a power factor of 0.8. Performance tolerance is ± 5%  
Fuel specification: BS 2869: Part 2 1998 Class A2 or ASTM D975 D2  
Lubricating oil: 15W40 to ACEA E3 or API CG4

#### Rating Definitions

**Baseload power:** Power available for continuous full load operation. Overload of 10% permitted for 1 hour in every 12 hours' operation  
**Prime power:** Power available at variable load with a load factor not exceeding 80% of the prime power rating. Overload of 10% is permitted for 1 hour in every 12 hours' operation  
**Standby power (maximum):** Power available at variable load in the event of a main power network failure up to a maximum of 500 hours per year of which up to 300 hours may be continuous. No overload is permitted.

# 1300 Series

## 1306C-E87TAG4

### Standard ElectropaK Specification

#### Air inlet

- Mounted air filter and turbocharger

#### Fuel system

- Hydraulically actuated electronically controlled unit fuel injectors with full authority electronic control
- Electronic governing to ISO3046-4 with stand-alone isochronous or load-sharing capabilities
- Spin-on fuel filter with pre-filter and hand primer pump

#### Lubrication system

- Wet rear well steel sump with filler and dipstick
- Full-flow spin-on filter
- Tube-type oil cooler thermostatically controlled

#### Cooling system

- Thermostatically controlled cooling system with belt-driven circulating pump and 24 inch belt-driven fan
- Radiator mounted with with all guards and pipes
- Air/air charge cooler incorporated in radiator
- Coolant filter/conditioner

#### Electrical equipment

- 24V starter motor and 24V 45 amp alternator with DC output
- Electronic Control Module mounted on engine with wiring looms and sensors
- 3 level engine protection system

#### Flywheel and housing


- High inertia flywheel to SAE J620 size 11 1/2
- Cast iron SAE 2 flywheel housing

#### Mountings

- Front engine mounting bracket

#### Optional equipment

- 12V starter and alternator
- 12V ECM
- Sensor positions for:
  - Heater/starter switch
  - Rear engine mountings
  - Exhaust silencer
- SAE 1 flywheel housing and flywheel
- Turbocharger exhaust outlet
- User's handbook and parts manual
- Workshop manual

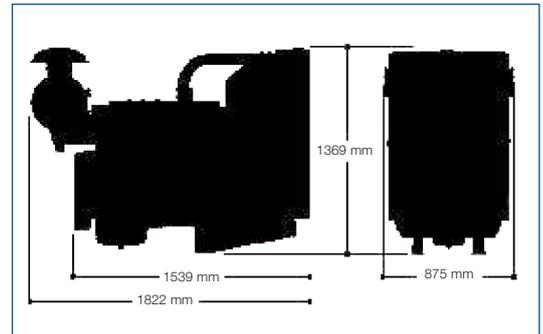

Fuel Consumption				
Engine Speed	1500 rev/min		1800 rev/min	
	g/kWh	l/hr	g/kWh	l/hr
Standby	201	53.0	214	61.0
Prime power rating	201	48.5	210	54.4
75% of prime power	207	37.5	208	40.3
50% of prime power	216	26.1	216	27.9

#### General Data

Number of cylinders	6
Cylinder arrangement	Vertical in-line
Cycle	4 stroke
Induction system	Turbocharged, air-to-air chargecooled
Combustion system	Direct injection
Cooling system	Water-cooled
Bore and stroke	116.6 mm x 135.9 mm
Displacement	8.7 litres
Compression ratio	16.9:1
Direction of rotation	Anti-clockwise, viewed on flywheel
Total lubrication	26.4 litres
System capacity	
Total Coolant capacity	37.2 litres
Dry weight (engine)	895 kg
Length	1822 mm
Width	875 mm
Height	1369 mm



#### Perkins Engines Company Limited

Peterborough PE1 5NA  
 United Kingdom  
 Telephone +44 (0)1733 583000  
 Fax +44 (0)1733 582240  
[www.perkins.com](http://www.perkins.com)



Distributed by